

Ensure Food Quality and Safety

Assure consistent product quality and avoid food safety dangers by using the BB Timer to monitor your grill, fryer, oven, mixer, holding stations or buffet line. The BB Timer will enable you to increase product yields, reduce the costs of goods sold and enhance your guests' experience.

Choice of Programming Modes


BB Timers can either be used as a dedicated count up/down timer or for repeating "Crew Alerts," to remind staff to wash hands and sanitize work stations and high traffic areas, such as prep and pack stations, rest rooms and guest areas.

Commercial Grade

BB4 and BB8 Timers are durable, yet lightweight (just about one pound), and feature a space-saving design. They are fully RoHS compliant, offer splash protection and are water-resistant, with plastic-enclosed electronics protection at the IP64 level. BB Timers include sophisticated controls and algorithms for optimal performance, while digitized counters assure maximum data accuracy. The batteries (4 - 1.5V AA dry cell; total 6 Volts) will power the BB Timer for more than 10-months when used with branded, commercially available batteries.

No Installation Required

BB4 and BB8 Battery Timers can be placed, or moved, wherever needed. You don't need an electrician for installation – just insert the batteries and you're good to go. BB Timers have a magnetic backing, so they can be placed on most metal surfaces within the kitchen. A permanent mounting bracket and a mounting plate that can affix to the wall and hold the BB Timer by its magnetic backing are available options.

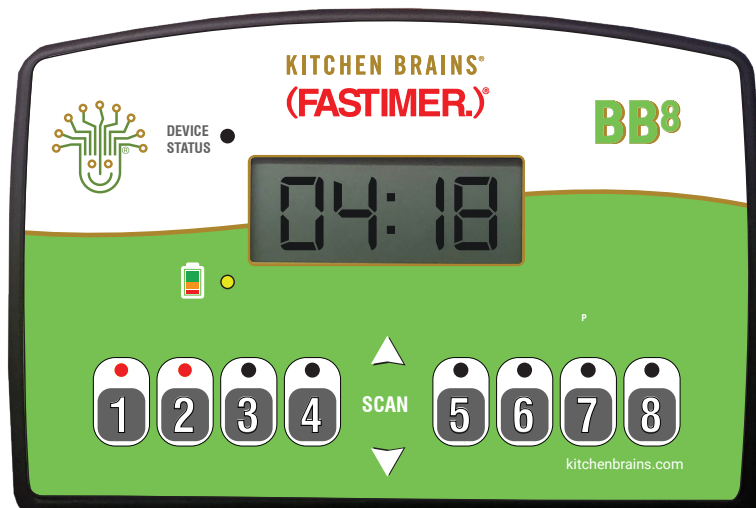

Easy to Program

Press the Program (P) Key for 3 seconds when idle and you can set the real time and each of the timers. Time up or down, or up then down, on each channel from 1 second to 99 hours. You'll find a BB Timer Quick Start Programming Guide right inside the box with all the information you need.

Easy to Use

BB Timers have large push buttons for easy operation, a choice of three volume levels for audio alerts and big LED indicators for across-the-kitchen viewing. Just press the appropriate channel button and the timing begins. When timing is complete, press and hold the button for three seconds to end the alert.



BB4 & BB8 Battery Timers

Device shown without brackets

Specifications

Mechanical

- Size: 7.42" (188.52mm) L x 6.08" (154.32mm) H x 1.48" (37.62mm) D
- Weight: 1.16 pounds
- Mounting: Magnetic backing; brackets and mounting plate as options
- Housing: Commercial-grade plastic
- Overlay: Polyester film with back printed text
- Operating Temperature Range: 32°F to 158°F (0°C to 70°C)

Electrical

- DC Battery Power: 4x1.5V AA batteries (6V total)¹ sold separately
- Battery Charge Duration: 10 months*
- Indicators:
 - 4 Digits LCD, 7 segment 0.71" digit size
 - LEDs for status and cooking products

Shipping Weight

- 1 Pound
- * Battery life estimation is approximate and dependent on use case

ORDERING INFO

231-60311-11	BB4 Battery Timer
231-60311-01	BB8 Battery Timer
120-60009	Batteries
213-50788-01	Magnetic Plate
213-50766-03	Mounting Bracket Kit

WARRANTY

Kitchen Brains warrants that BB Timers shall not fail to function in accordance with their specifications because of defects in material or workmanship for six-months from the date of purchase.






RoHS CE

TIMER
NSF/ANSI2
-S449245-



KITCHEN BRAINS®

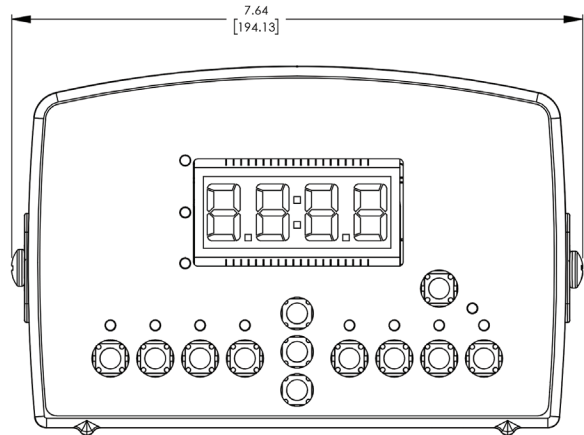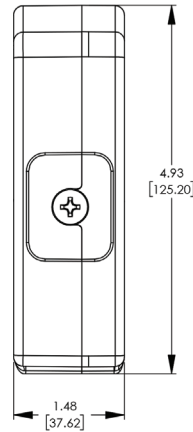

Device shown with brackets
(Sold Separately)

